



DURA SKRIM[®] 2 & 10HUV

PRODUCT DESCRIPTION

DURA SKRIM 2 and 10HUV consist of two sheets of high-strength polyethylene film laminated together with a third layer of molten polyethylene. A heavy-duty scrim reinforcement placed between these plies greatly enhances tear-resistance and increases service life. DURA SKRIM's heavy-duty diamond reinforcement responds to tears by surrounding and stopping the tear.



PRODUCT USE

DURA SKRIM 2 is used for temporary applications that require a lightweight yet highly tear-resistant film such as building enclosures and abatement applications.

DURA SKRIM 10HUV is used in applications that require good outdoor life and demand high puncture and tear strengths. The two outer layers of DURA SKRIM 10HUV contain high concentrations of UV inhibitors and thermal stabilizers to assure added outdoor life up to approximately two years.

SIZE & PACKAGING

DURA SKRIM 2 stock sizes are 6, 8, 10, 12, 16, 20, 24, 28, 32, 40, and 60 feet wide and 50 feet long or more in 5 foot increments, with 100 foot rolls being the most popular. Wide widths in 24 foot increments + one or two 6 foot panels. **DURA SKRIM 10HUV** is available in a variety of widths and lengths up to 100,000 square foot panels. All panels are accordion folded and tightly rolled on a heavy-duty core for ease of handling and time saving installation.

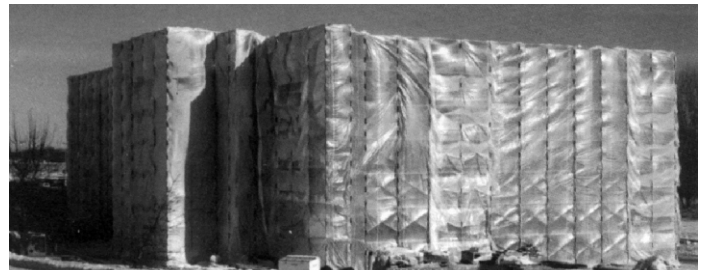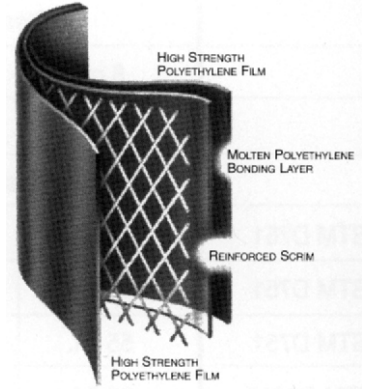

Building Enclosure

COMMON APPLICATIONS

- Construction Enclosures
- Vapor Barriers
- Temporary Liners or Covers
- Erosion Control
- Shipping and Packaging
- Insulation Membranes
- Asbestos Abatements
- Fumigation Covers
- Temporary Walls
- Remediation Covers



DURA SKRIM[®] 2 & 10HUV

PROPERTIES	TEST METHOD	DURA•SKRIM 2		DURA•SKRIM 10HUV	
		English	Metric	English	Metric
APPEARANCE		Clear		Clear	
THICKNESS, NOMINAL		6 mil	0.15 mm	10 mil	0.25 mm
WEIGHT PER MSF		19 lbs	8.5 kg	41 lbs.	18.6 kg
CONSTRUCTION		Extrusion laminated with scrim reinforcement			
*1" TENSILE STRENGTH	ASTM D751	40 lbf.	178 N	50 lbf.	223 N
ELONGATION AT BREAK	ASTM D751	400%	400%	800%	800%
*GRAB TENSILE	ASTM D751	50 lbf.	223 N	85 lbf.	378 N
*TRAPEZOID TEAR	ASTM D4533	35 lbf.	156 N	52 lbf.	231 N
HYDROSTATIC RESISTANCE	ASTM D751	32 psi	220 kPa	70 psi	483 kPa
MULLEN BURST	ASTM D751	65 psi	449 kPa	130 psi	897 kPa
MAXIMUM USE TEMPERATURE		180°F	82°C	180°F	82°C
MINIMUM USE TEMPERATURE		-70°F	-57°C	-70°F	-57°C
PERMEABILITY					
WVTR	ASTM E96 Procedure B	0.058 g/100in ² /day	0.90 g/m ² /day	0.017 g/100in ² /day	0.27 g/m ² /day
PERM RATING	ASTM E96 Procedure B	0.13 U.S. Perms	0.086 Metric Perms	0.039 U.S. Perms	0.026 Metric Perms

Tests are an average of diagonal directions.



DURA SKRIM 2 is a clear four layer reinforced extrusion laminate. The outer layers consist of a clear high-strength polyethylene film. DURA SKRIM 2 is reinforced with a minimum of a 900 denier scrim laid in a diagonal pattern spaced 3/8" apart with an additional machine direction scrim every 9" across the width. The individual plies are laminated together with molten polyethylene.

DURA SKRIM 10HUV is a clear, four-layer reinforced extrusion laminate. The outer layers consist of a high strength polyethylene film with a high concentration of U.V. and thermal stabilizers. DURA SKRIM 10HUV is reinforced with a 900 denier scrim laid in a diagonal pattern spaced 3/8" apart with an additional machine direction scrim every 3" across the width. The individual plies are laminated together with molten polyethylene.

Note: To the best of our knowledge, these are typical property values and are intended as guides only, not as specification limits. AMERICOVER[®] MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage.

Americover[®]

toll free (800) 747-6095 • local (760) 747-6095 • fax (760) 747-1920

e-mail: sales@americover.com

website: www.americover.com

2067 Wineridge Pl. #F • Escondido, CA 92029