


268FR TAPE

FLAME RETARDANT DUCT TAPE

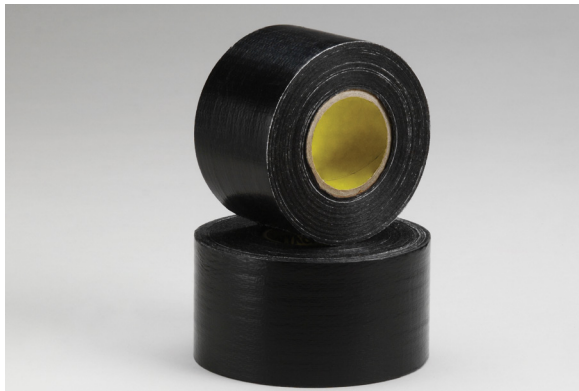

PRODUCT

PART NUMBER

2"X100' Tape268FR

APPLICATIONS

Used in areas where flame retardancy is required. For sealing duct work, fiberglass insulation and wire harness insulation and bundling applications.

PRODUCT DESCRIPTION

A superior flame retardant sealing duct tape with acrylic coated cloth and a natural rubber adhesive that self-extinguishes.


- Non-corrosive to copper wire
- Easy to tear and offers exceptionally aggressive adhesive to a variety of substrates such as steel and plastic.
- Exhibits outstanding handling characteristics and conforms well to duct systems
- Meets ASTM D 568 - ISO 3795

SIZE & PACKAGING

- 2"X100' rolls available
- Comes in Black

268FR TAPE
FLAME RETARDANT DUCT TAPE

PROPERTIES	TEST	IMPERIAL VALUES	METRIC VALUES
Adhesion to Steel	PSTC-1	60 oz/in	67.2g/mm
Tensile	PSTC-31	25 lb/in	0.45 kg/mm
Thickness	ASTM D1000	8.5 mils	0.22mm

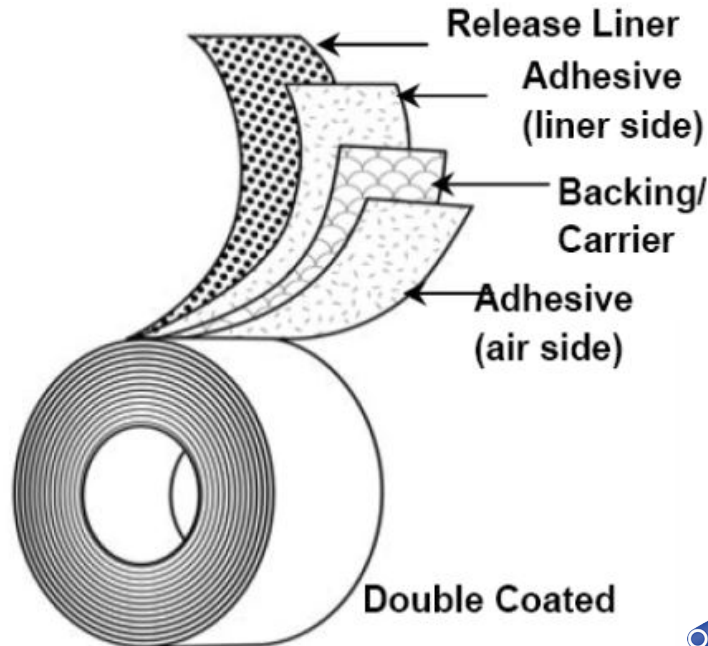

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, express or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.

Scan for our mobile app

