


# HEAT SHRINK WRAP

7 & 8.5 MIL WHITE/BLUE SHEETING

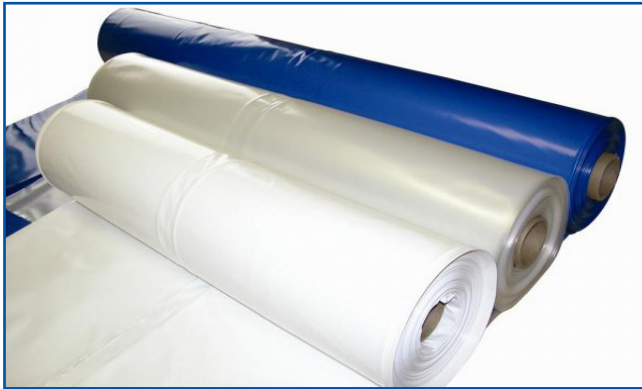

## PRODUCT DESCRIPTION

Our shrinkwrap is 100% virgin resin material, with extremely consistent mil thickness and opacity. It contains 5% UV inhibitors by weight for excellent performance during long term storage and transportation.

Available in white and blue

## PRODUCT

## PART NUMBER

7 mil Heat Shrink Wrap.....	HSW7
8.5 mil Heat Shrink Wrap.....	HSW8.5

## PRODUCT USE

7 mil shrink wrap is the standard film thickness for shrink wrapping boats in snow load areas.

## APPLICATIONS

- Boat Shrink Wrap
- Shed Frame Protection
- Pallet Wrap
- Machinery Covers
- Light Construction jobs
- Transportation cover of medium sized machinery.
- Industrial containment of plant equipment/ components

## SIZE & PACKAGING

Rolls

# HEAT SHRINK WRAP

7 & 8.5 MIL WHITE/BLUE SHEETING

PROPERTIES	TEST METHOD	UNITS (IMPERIAL)	7 MIL SHRINK	8.5 MIL SHRINK
Weatherability	ASTM G63	Hours	Over 1000	Over 1000
Thickness	ASTM D374	Mil	7	8.6
Shrink Temperature	ASTM D2732	Degrees F	275°	275°
TENSILE PROPERTIES				
Yield (md/cd)	ASTM D882	psi	1400/1200	1400/1200
Break (md/cd)	ASTM D882	psi	2500/2400	2500/2400
Elongation (md/cd)	ASTM D1922	gm	600/1100	800/1000
Dart Impact	ASTM D1709	gm	750	900
Blow-Up Ratio (md/cm)	-	%	45-60/30-40	45-60/30-40



Scan for our mobile app



The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, express or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.