




STRING REINFORCED POLY

POLYESTER SCRIM REINFORCED LLDPE SHEETING

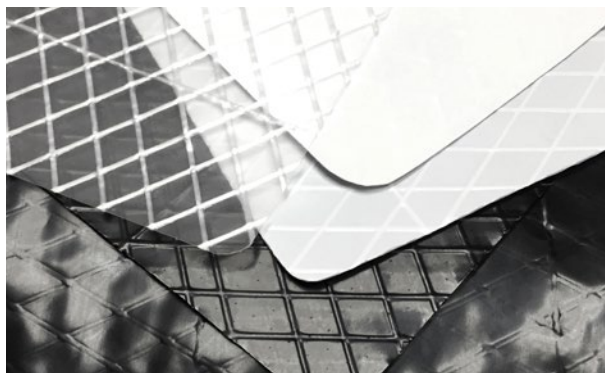

PRODUCT DESCRIPTION

String reinforced poly sheeting consists of two sheets of high-strength virgin polyethylene film laminated together with a third layer of molten polyethylene. Outer layers contain UV inhibitors and thermal stabilizers to enhance outdoor life. A heavy scrim reinforcement placed between these layers greatly enhances tear resistance and increases service life. The individual plies are laminated together with molten polyethylene.

All stocked widths are available in 100 ft lengths. Custom lengths are available

COLOR FEATURE	THICKNESS	STANDARD WIDTHS					
WHITE FIRE RETARDANT	6 MIL	4'	6'	8'	12'	16'	20'
	8 MIL	4'	8'	12'	16'	20'	
	10 MIL	6.75'	20'				
	14 MIL	4'	8'	12'	16'	20'	
CLEAR	6 MIL	4'	6'	8'	10'	12'	16' 20' 40' 60'
	8 MIL	4'	8'	12'	16'	20'	
	10 MIL	6'	20'				
BLACK/WHITE	6 MIL	4'	6'	8'	12'	16'	20'
	8 MIL	6'	12'	20'	24'		
	12 MIL	6'	12'	24'			
	14 MIL	4'	8'	12'	16'	20'	
WHITE	6 MIL	4'	6'	8'	12'	16'	20'
	8 MIL	4'	8'	12'	16'	20'	
	12 MIL	4'	8'	12'	16'	20'	
	20 MIL	4'	6'	8'	12'	18'	20'
BLACK	6 MIL	4'	6'	8'	12'	16'	20'
	8 MIL	4'	6'	8'	12'	16'	20'
	12 MIL	6'	20'	24'			
WHITE ANTI-STATIC FIRE RETARDANT	6 MIL	12'	20'				

STRING REINFORCED POLY

APPLICATIONS



- ▶ Building & construction enclosures
- ▶ Vapor barriers
- ▶ Crawlspace encapsulation liners
- ▶ Erosion control
- ▶ Shipping and packaging
- ▶ Temporary liner or cover
- ▶ Asbestos abatement
- ▶ Remediation covers
- ▶ Greenhouse/light deprivation covers
- ▶ Fumigation covers
- ▶ Cargo wraps
- ▶ Temporary walls or partitions
- ▶ Lumber covers
- ▶ Ice rink liners
- ▶ Sets and production
- ▶ Equipment protection
- ▶ Aquaponic/hydroponic liners
- ▶ And much more

