



Tempshield Double Bubble White/Foil®

Reflective Insulation



TempShield® Double Bubble White/Foil is our top-of-the-line Reflective Insulation, and is available in 300 and 500 Sq. Ft. Rolls, 4' and 6' standard widths.

TempShield® Brand Double Bubble White/Foil is *two* layers of 1/8" barrier bubble film laminated between *one* layer of metalized film and one layer of white polyethylene.


TempShield® Double Bubble White/Foil is designed to be used for concrete slab pad or metal buildings where aesthetics is of primary importance.



TempShield® Double Bubble White/Foil in a concrete slab application is two-fold; first, it acts as a vapor retarder and second, it provides a thermal break. The thermal resistance of TempShield® product under concrete is based on testing done on a calibrated hotplate using ASTM 518 test procedures.

Key Benefits

- Clean, Lightweight, Easy To Install
- White Appearance
- Saves Energy and Money

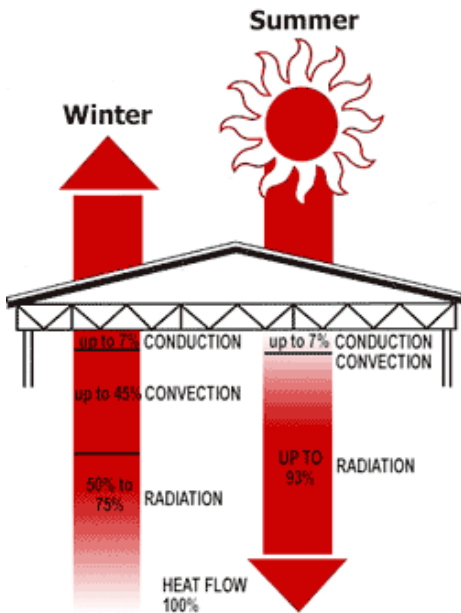

How Radiant Heat Transfers Through Roofs

TempShield® is used as insulation against radiant heat transfer and can be used to its greatest advantage in instances where radiation is the predominant means of heat transfer. It is the bright aluminized film surface of all TempShield® products that gives it its insulating properties. This happens in two ways:

TempShield® is an excellent reflector of all long wave radiant heat that strikes it - reflecting up to 95% of all radiant heat.

TempShield® will reradiate only 5% of heat in which it comes in close physical contact, compared with the approximate 90% reradiation of ordinary building materials, at the same temperature.

Product Specifications

Product Description	Two layers of 1/8" barrier bubble film laminated between one layer of reflective metalized film and one layer of white polyethylene
Contact Temperature Range	-60°F to 180°F (-51°C to 82°C)
Thickness	1/8 inch nominal
Water Vapor Transmission	.02 perms ASTM E96
Puncture Resistance	60 lbs/in
Pliability	No Cracking
Linear Shrinkage	None
Mold and Mildew	No Growth
Flame Spread	0 ASTM E84-08
Smoke Development	20 ASTM E84-08
Fire Rating	Class A/Class 1